| | |
|---|---|
| 项目 | |
| 库 | |
| 文件名 | |

校对清单：


- 核对客户型号
- 比对铭牌参数
- 标注颜色/尺寸
- 材质规格

黑色

Midea

# 颜色要求请见第二页

# 此为1:1图纸，请按图纸制做，请勿随意变动

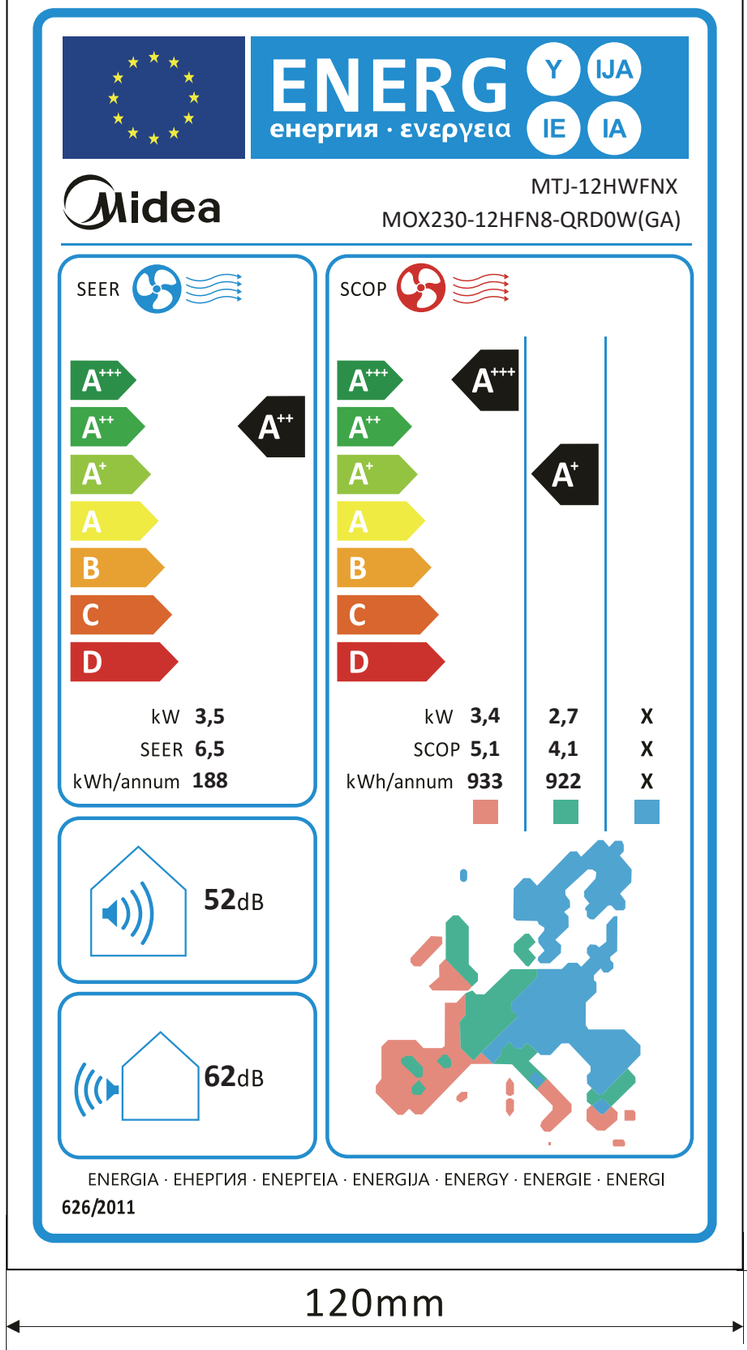


技术要求（版本号：E，2017-03）

1. 能效标识外观质量、材料性能应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
2. 未注尺寸公差应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
3. 外协生产必须严格按电子文档进行输出；
4. 印刷颜色如图纸标注（未注字体和图案印刷颜色为黑色）
5. 有RoHS指令要求的物料应符合美的企业标准QMK-J000.1002《产品中限制使用有害物质的技术标准》。
6. 有REACH要求的物料应符合QMK-J000.1008《REACH法规要求技术标准》。

Technical Requirement(Ver.: E, 2017-03)

1. Appearance quality and material performance of energy label shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
2. Undimensioned dimensional tolerance shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
3. Out-sourced production shall be in strict accordance with electronic document;
4 . Printing color shall as per the drawing(undimensioned fonts and drawings are black )
5. Materials subject to RoHS shall comply with QMK-J000.1002 Technical Standard for Restricted Hazardous Substance in the Products of MIDEA.
6. Materials subject to REACH shall comply with QMK-J000.1008 Technical Standard for REACH of MIDEA.

MTJ-12HWFNX

| 标记 | 处数 | 更改文件号 | 签字 | 日期 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

| | | | | |
|---|---|---|---|---|
| 绘图 | 辛静环 | 审核 | 符春金 | |
| 设计 | 辛静环 | 标准化 | 符春金 | |
| 校对 | | 审定 | | |
| 会签 | 苏妮 | 日期 | 2024.09.27 | |

能效标贴


| 图样标记 | | 重量 | 比例 |
|---|---|---|---|
| | K | / | 1:1 |

共 1 页　第 1 页

XXXXX

材料　铜版纸（不干胶）80g/m² 过UV油

广东美的制冷设备有限公司

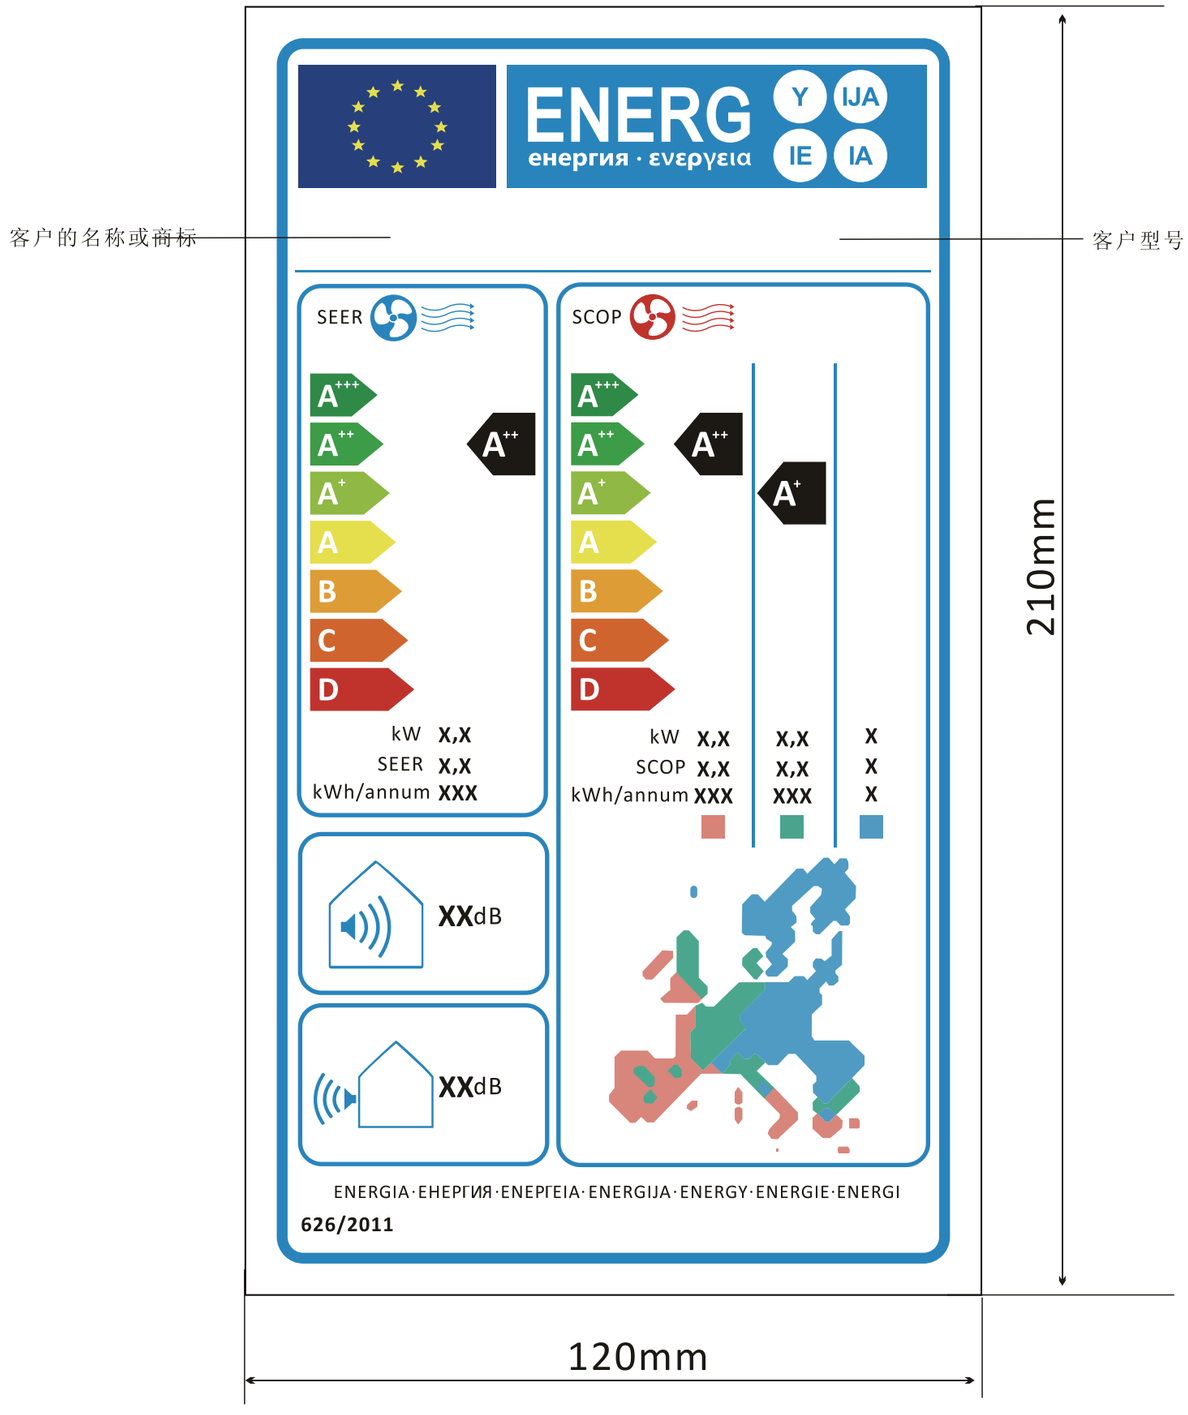


## Color Guide

- C100 M80 Y0 K0
- C100 M0 Y0 K0
- C0 M0 Y0 K100
- C100 M0 Y100 K0
- C70 M0 Y100 K0
- C30 M0 Y100 K0
- C0 M0 Y100 K0
- C0 M30 Y100 K0
- C0 M70 Y100 K0
- C0 M100 Y100 K0
- C0 M46 Y46 K0
- C59 M0 Y47 K0
- C54 M8 Y0 K0

此为1:1图纸，请按图纸制做，请勿随意变动

| | |
|---|---|
| 项目 | |
| 库 | |
| 文件名 | |

校对清单：


- 核对客户型号
- 比对铭牌参数
- 标注颜色/尺寸
- 材质规格

黑色

Midea

# 颜色要求请见第二页

# 此为1:1图纸，请按图纸制做，请勿随意变动

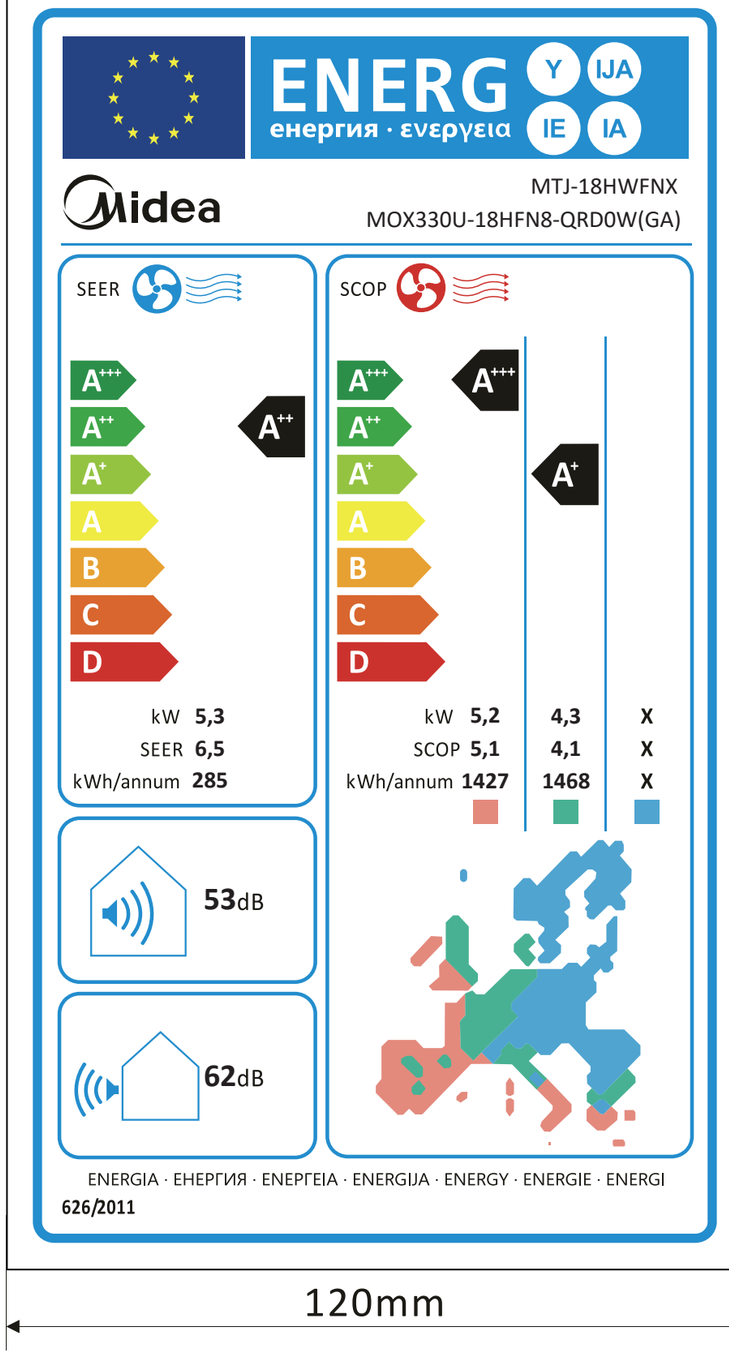


210mm

120mm

技术要求（版本号：E，2017-03）

1. 能效标识外观质量、材料性能应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
2. 未注尺寸公差应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
3. 外协生产必须严格按电子文档进行输出；
4. 印刷颜色如图纸标注（未注字体和图案印刷颜色为黑色）
5. 有RoHS指令要求的物料应符合美的企业标准QMK-J000.1002《产品中限制使用有害物质的技术标准》。
6. 有REACH要求的物料应符合QMK-J000.1008《REACH法规要求技术标准》。

Technical Requirement(Ver.: E, 2017-03)

1. Appearance quality and material performance of energy label shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
2. Undimensioned dimensional tolerance shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
3. Out-sourced production shall be in strict accordance with electronic document;
4 . Printing color shall as per the drawing(undimensioned fonts and drawings are black )
5. Materials subject to RoHS shall comply with QMK-J000.1002 Technical Standard for Restricted Hazardous Substance in the Products of MIDEA.
6. Materials subject to REACH shall comply with QMK-J000.1008 Technical Standard for REACH of MIDEA.

MTJ-18HWFNX

| 标记 | 处数 | 更改文件号 | 签字 | 日期 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

| | | | | |
|---|---|---|---|---|
| 绘图 | 辛静环 | 审核 | 符春金 | |
| 设计 | 辛静环 | 标准化 | 符春金 | |
| 校对 | | 审定 | | |
| 会签 | 苏妮 | 日期 | 2024.09.27 | |

能效标贴


XXXXX

材料 铜版纸（不干胶）80g/m² 过UV油

| 图样标记 | | 重量 | 比例 |
|---|---|---|---|
| | K | | 1:1 |

共 1 页 第 1 页

广东美的制冷设备有限公司

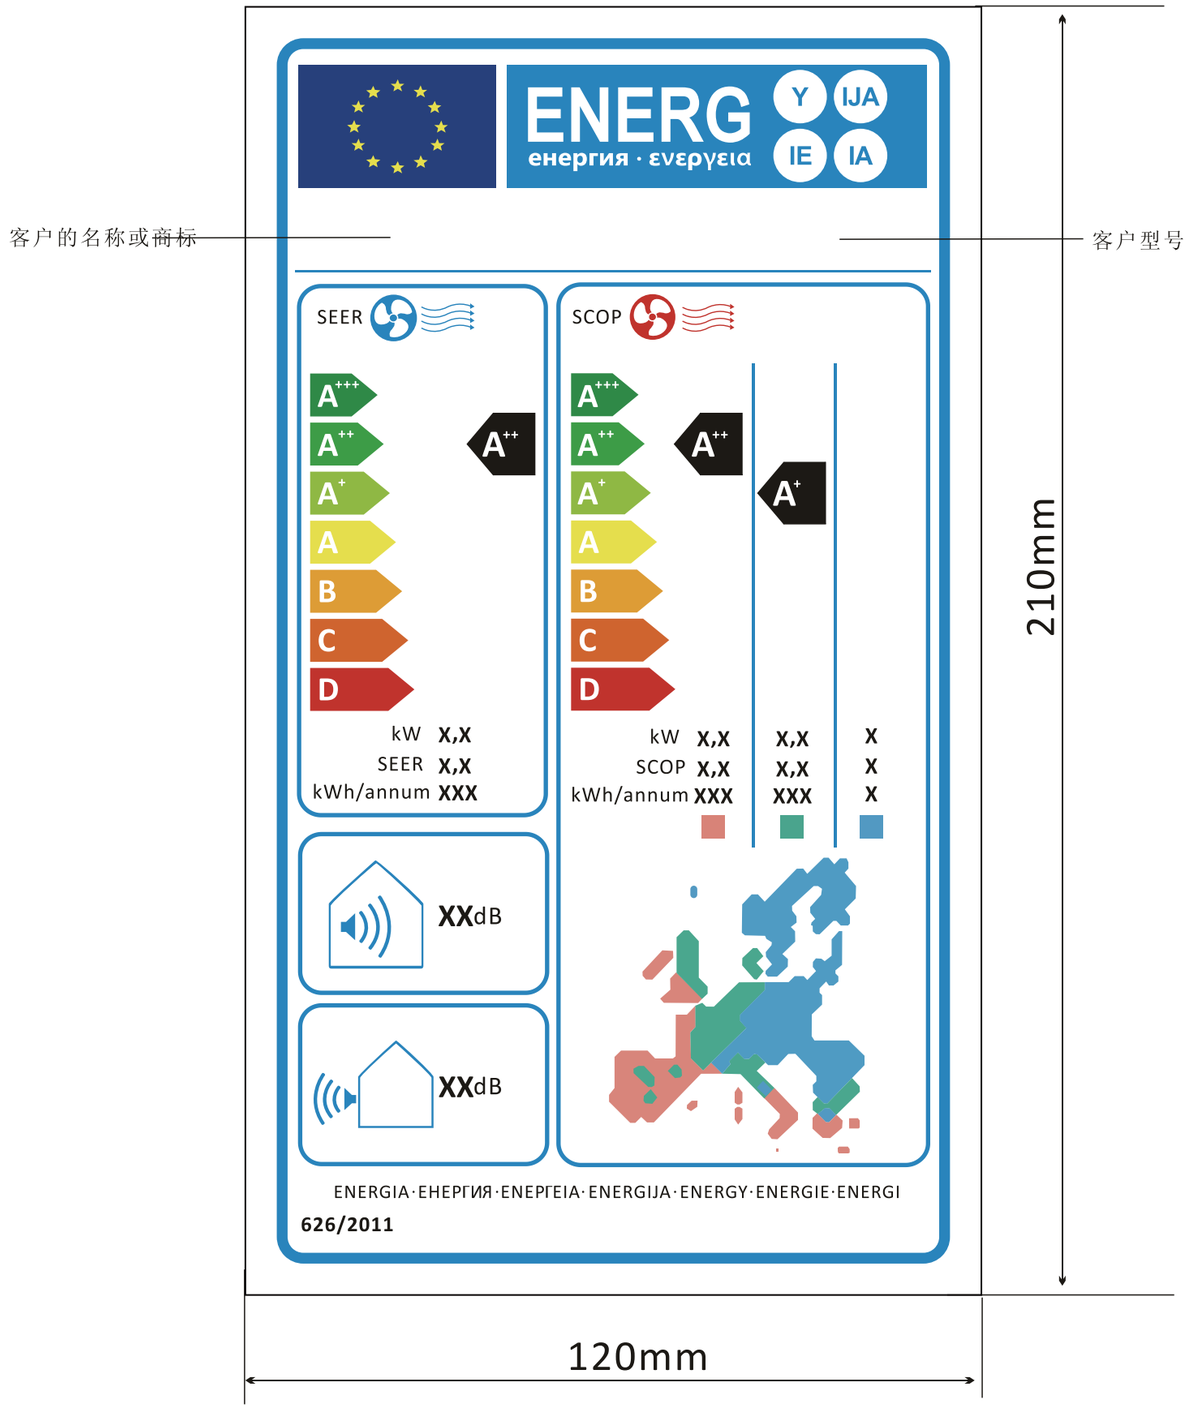


## Color Guide

- C100 M80 Y0 K0
- C100 M0 Y0 K0
- C0 M0 Y0 K100
- C100 M0 Y100 K0
- C70 M0 Y100 K0
- C30 M0 Y100 K0
- C0 M0 Y100 K0
- C0 M30 Y100 K0
- C0 M70 Y100 K0
- C0 M100 Y100 K0
- C0 M46 Y46 K0
- C59 M0 Y47 K0
- C54 M8 Y0 K0

此为1:1图纸，请按图纸制做，请勿随意变动

| | |
|---|---|
| 项目 | |
| 库 | |
| 文件名 | |

校对清单：


- 核对客户型号
- 比对铭牌参数
- 标注颜色/尺寸
- 材质规格

黑色

Midea

# 颜色要求请见第二页

# 此为1:1图纸，请按图纸制做，请勿随意变动

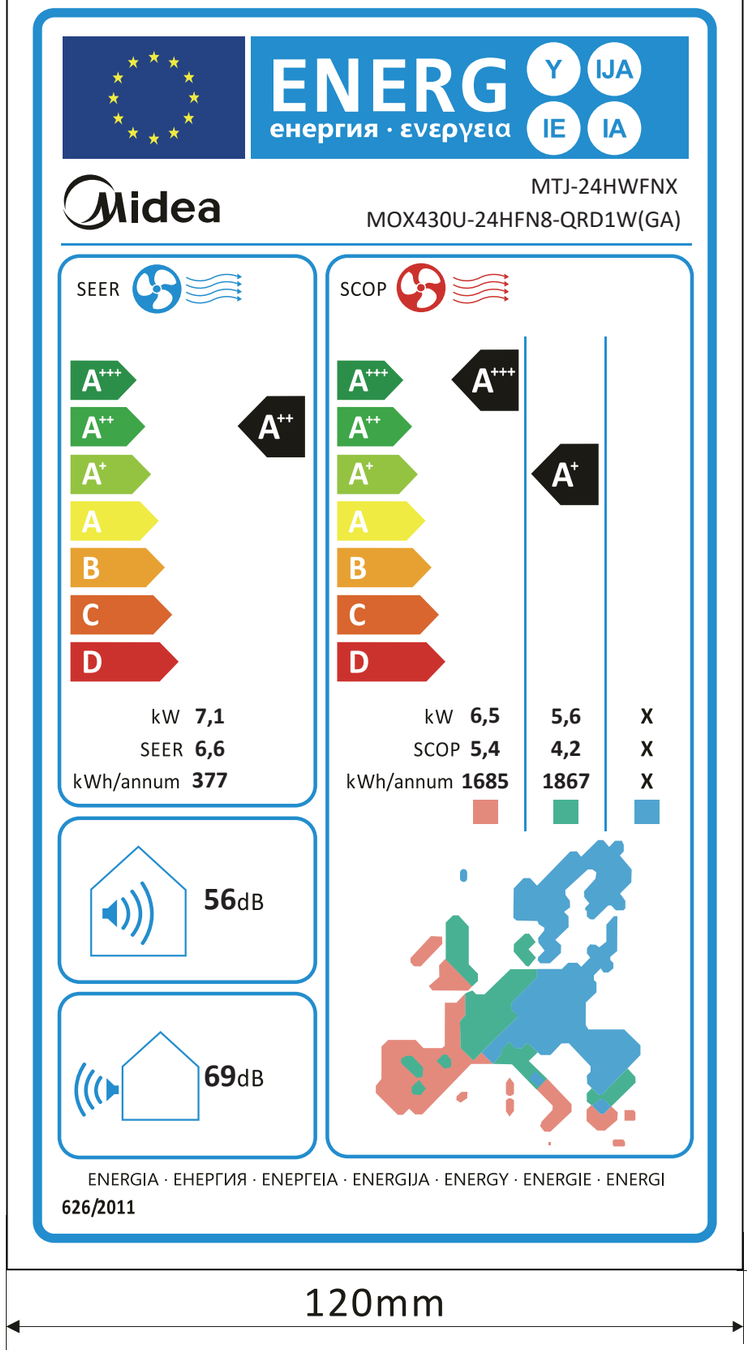


技术要求（版本号：E，2017-03）

1. 能效标识外观质量、材料性能应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
2. 未注尺寸公差应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
3. 外协生产必须严格按电子文档进行输出；
4. 印刷颜色如图纸标注（未注字体和图案印刷颜色为黑色）
5. 有RoHS指令要求的物料应符合美的企业标准QMK-J000.1002《产品中限制使用有害物质的技术标准》。
6. 有REACH要求的物料应符合QMK-J000.1008《REACH法规要求技术标准》。

Technical Requirement(Ver.: E, 2017-03)

1. Appearance quality and material performance of energy label shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
2. Undimensioned dimensional tolerance shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
3. Out-sourced production shall be in strict accordance with electronic document;
4 . Printing color shall as per the drawing(undimensioned fonts and drawings are black )
5. Materials subject to RoHS shall comply with QMK-J000.1002 Technical Standard for Restricted Hazardous Substance in the Products of MIDEA.
6. Materials subject to REACH shall comply with QMK-J000.1008 Technical Standard for REACH of MIDEA.

MTJ-24HWFNX

| 标记 | 处数 | 更改文件号 | 签字 | 日期 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

| | | | | |
|---|---|---|---|---|
| 绘图 | 辛静环 | 审核 | 符春金 | |
| 设计 | 辛静环 | 标准化 | 符春金 | |
| 校对 | | 审定 | | |
| 会签 | 苏妮 | 日期 | 2024.09.27 | |

能效标贴


XXXXX

| 图样标记 | | 重量 | 比例 |
|---|---|---|---|
| | K | / | 1:1 |

共 1 页　第 1 页

材料　铜版纸（不干胶）80g/m² 过UV油

广东美的制冷设备有限公司

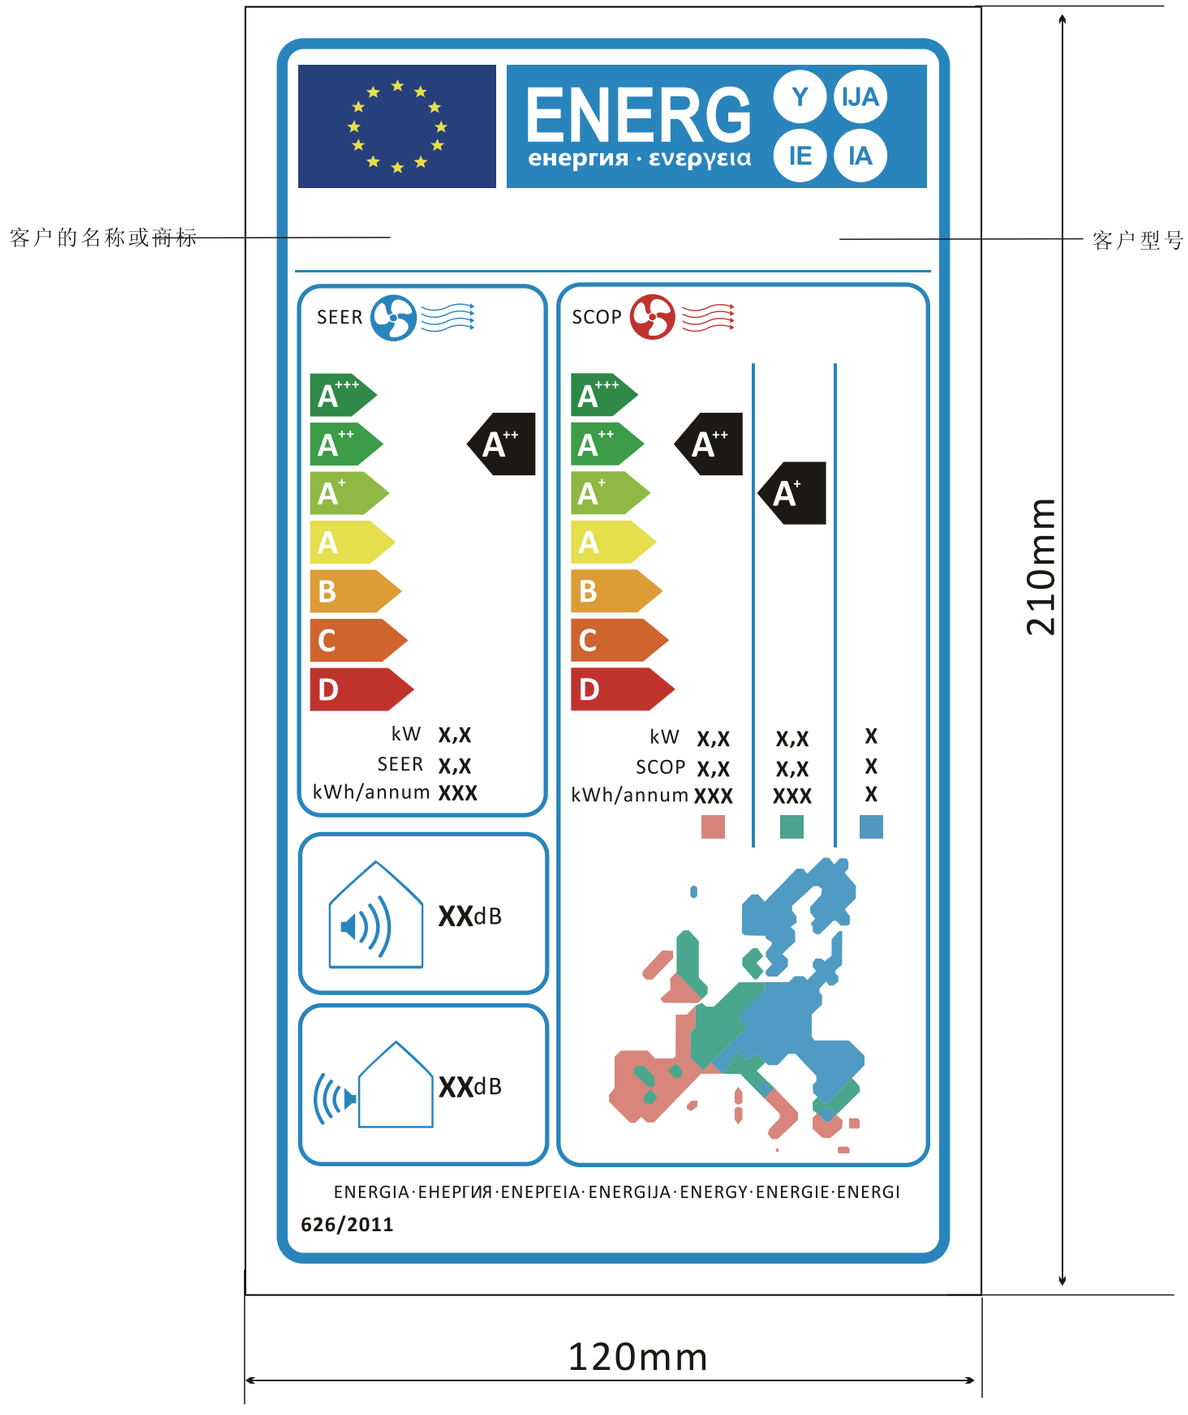


## Color Guide

- C100 M80 Y0 K0
- C100 M0 Y0 K0
- C0 M0 Y0 K100
- C100 M0 Y100 K0
- C70 M0 Y100 K0
- C30 M0 Y100 K0
- C0 M0 Y100 K0
- C0 M30 Y100 K0
- C0 M70 Y100 K0
- C0 M100 Y100 K0
- C0 M46 Y46 K0
- C59 M0 Y47 K0
- C54 M8 Y0 K0

此为1:1图纸，请按图纸制做，请勿随意变动

| | |
|---|---|
| 项目 | |
| 库 | |
| 文件名 | |

校对清单：


- 核对客户型号
- 比对铭牌参数
- 标注颜色/尺寸
- 材质规格

黑色

Midea

# 颜色要求请见第二页

# 此为1:1图纸，请按图纸制做，请勿随意变动

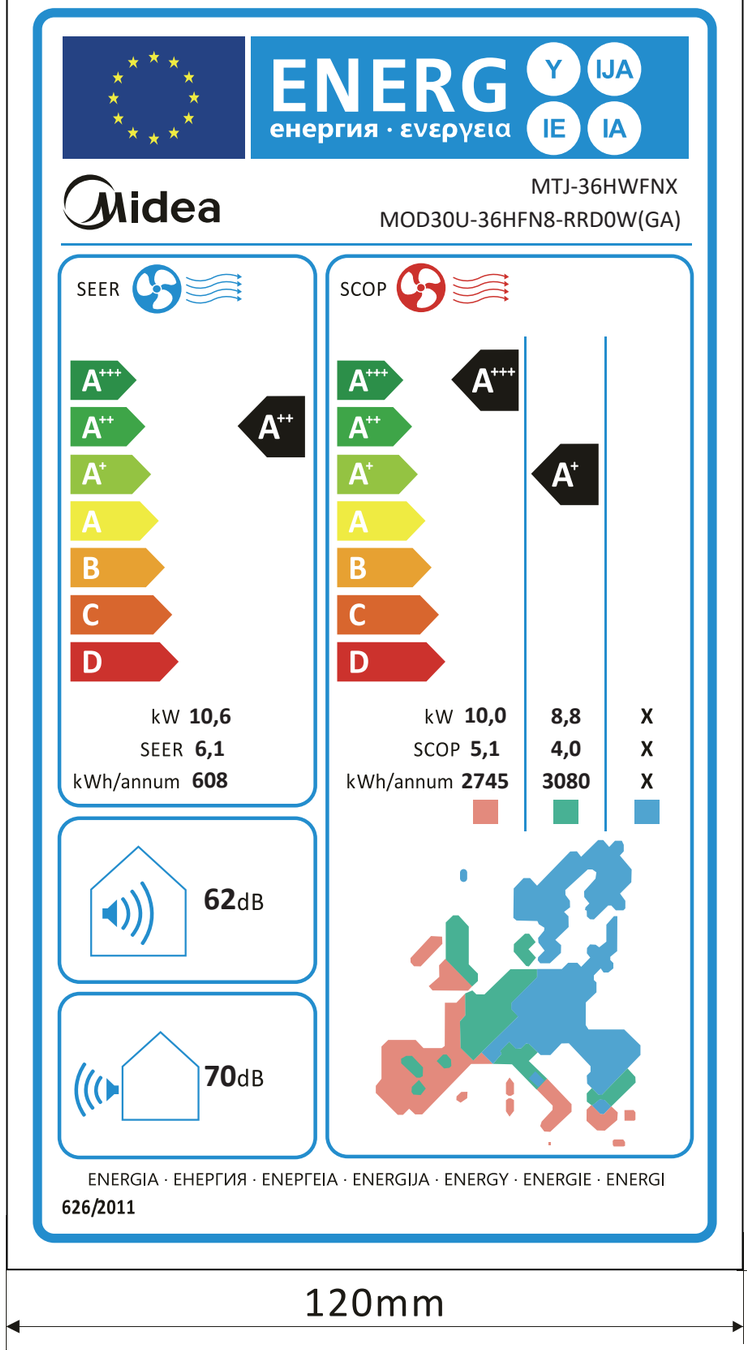


技术要求（版本号：E，2017-03）

1. 能效标识外观质量、材料性能应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
2. 未注尺寸公差应符合QMK(Z)-J53.025《能效标识技术条件》的有关要求；
3. 外协生产必须严格按电子文档进行输出；
4. 印刷颜色如图纸标注（未注字体和图案印刷颜色为黑色）
5. 有RoHS指令要求的物料应符合美的企业标准QMK-J000.1002《产品中限制使用有害物质的技术标准》。
6. 有REACH要求的物料应符合QMK-J000.1008《REACH法规要求技术标准》。

Technical Requirement(Ver.: E, 2017-03)

1. Appearance quality and material performance of energy label shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
2. Undimensioned dimensional tolerance shall comply with relevant requirement of QMK(Z)-J53.025 Technical Conditions for Energy Label;
3. Out-sourced production shall be in strict accordance with electronic document;
4 . Printing color shall as per the drawing(undimensioned fonts and drawings are black )
5. Materials subject to RoHS shall comply with QMK-J000.1002 Technical Standard for Restricted Hazardous Substance in the Products of MIDEA.
6. Materials subject to REACH shall comply with QMK-J000.1008 Technical Standard for REACH of MIDEA.

MTJ-36HWFNX

| 标记 | 处数 | 更改文件号 | 签字 | 日期 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

| | | | | |
|---|---|---|---|---|
| 绘图 | 辛静环 | 审核 | 符春金 | |
| 设计 | 辛静环 | 标准化 | 符春金 | |
| 校对 | | 审定 | | |
| 会签 | 苏妮 | 日期 | 2024.09.27 | |


能效标贴

XXXXX

| | | | | | |
|---|---|---|---|---|---|
| 图样标记 | | | 重量 | 比例 | |
| | K | | | / | 1:1 |
| 共 1 页 | | | 第 1 页 | | |

材料 铜版纸（不干胶）80g/m² 过UV油

广东美的制冷设备有限公司

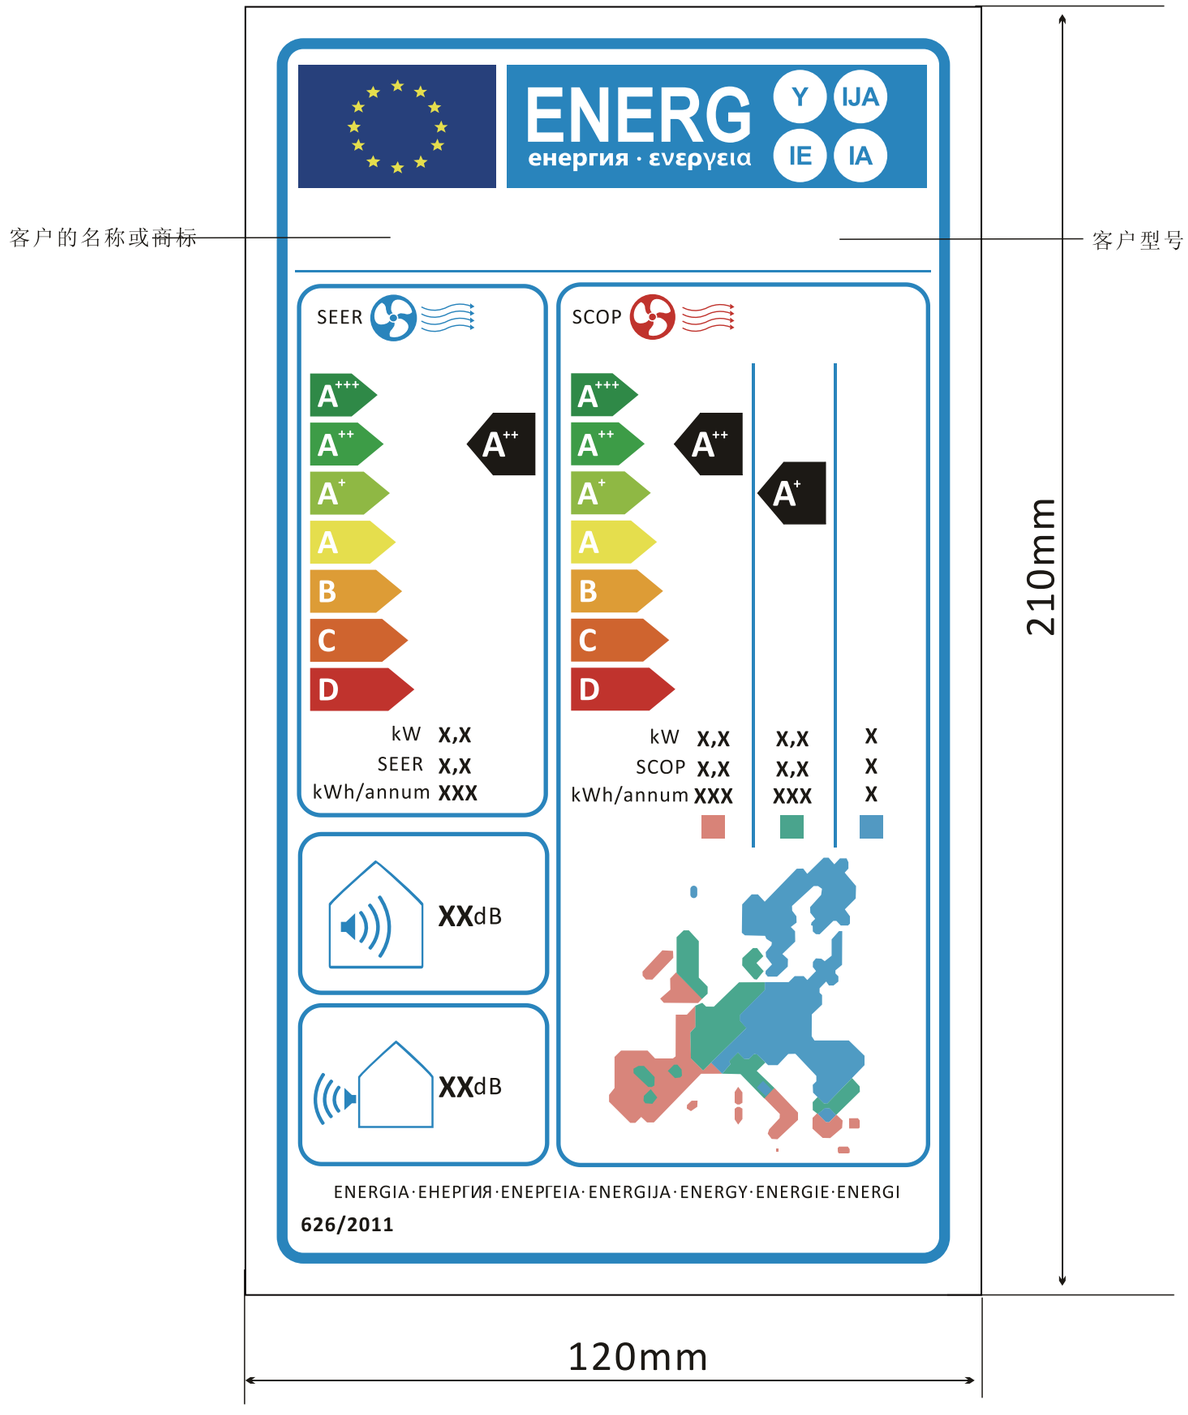


## Color Guide

- C100 M80 Y0 K0
- C100 M0 Y0 K0
- C0 M0 Y0 K100
- C100 M0 Y100 K0
- C70 M0 Y100 K0
- C30 M0 Y100 K0
- C0 M0 Y100 K0
- C0 M30 Y100 K0
- C0 M70 Y100 K0
- C0 M100 Y100 K0
- C0 M46 Y46 K0
- C59 M0 Y47 K0
- C54 M8 Y0 K0

此为1:1图纸，请按图纸制做，请勿随意变动